Technical Specifications

HP P22v G4 FHD Monitor

NEW MAIL	🗌 👻 Options 👻	0	Search 1-40 of 1
Inbox (21)	日 会 Brandon Patterson	RE: Annual expenses	10:12 pi
Folders -	🗇 ★ Jennifer Garcia	John's retirement lunch	9:53 p
Drafts (2)	🖂 🔹 National Airline	FW: Your Flight Itinerary to Newark, NJ	7:18 p
Send Trash	🖂 🏚 Callie Miller	New parking spots available	4:05 (
Important	🗌 🚖 Ella Martinez	Thoughts for Thursday's seminar	1:00
Quick Views -	🗆 🛱 Arun Munjal	Incredible video!	11:09
Flagged	🖂 🏫 Matt Chang	Who stole my lunch bag??!	10:33
Office Docs	🔲 🏤 Joni Nyugen	RE: Tuesday	9:24
 Photos Shipping Updates 	🗇 🏫 Outdoors Retailer	50% off winter wear	7:44
	💭 🕸 Emma Smith	RE: hilarious	Ja
Contacts 🛋 📞	Donald Hartwood	Updated company bio	Ji
John Stone	🔲 🏠 Joni Nyugen	Tuesday	J
Erica Anderson	Emily Davis	FW: hilarious	
& Karen Williams	🔲 🕸 Mod House	Three-day furniture sale! Beds, desks, consoles, chairs	
Stephen Lee	🖂 🕸 Joseph White	One more thing: Dinner this Saturday?	
	🔲 🕸 Urban Nonprofit	Almost to our goal	
	🗆 🎄 Reeja James	Amazing recipe!!	
		(m)	
		Ψ <i>ν</i>	


Front

1. OSD Buttons

2. Power Button (With power light)

Technical Specifications

HP P22v G4 FHD Monitor THOR

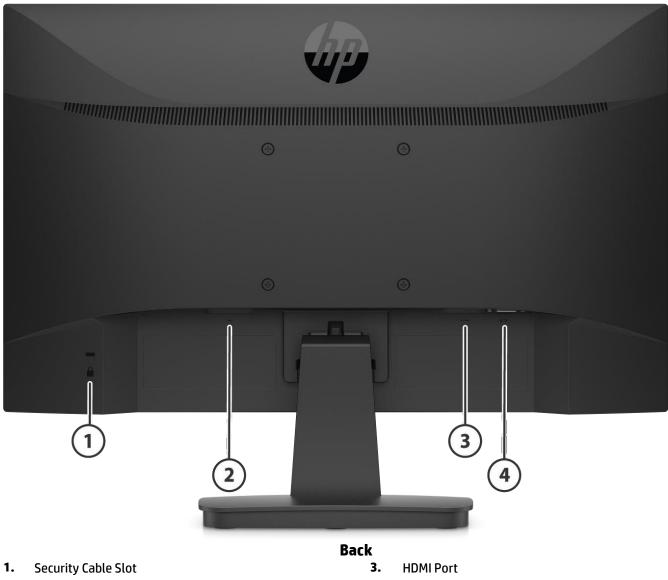

2. Power Connector

4. VGA Connector

Technical Specifications

Models: 9TT53AA/9TT53A6/9TT53A7/9TT53AS/9TT53AT/9TT53AV

Panel Specifications	Display Size (Diagonal)	21.5-inch
	Panel Technology	TN
	Curved Panel	No
	Refresh Rate	60 Hz
	Panel Bit Depth	8 bit
	Aspect Ratio	16:9
	Brightness - Typical	250 nits
	Static Contrast Ratio	1000:1
	Static Contrast Ratio - Minimum	700:1
	Dynamic Contrast Ratio	8M:1 (min.)
	Flicker Free	No
	Pixel Pitch	0.24825 x 0.24825mm
	Pixels Per Inch (PPI)	102
	Backlight Lamp Life	30 k minimum
	(to half brightness - in hours)	
	Backlight Type	Edge-lit
	Screen Treatment	Anti-glare
	Hardness	3H
	Haze	25%
	Response Time - Typical	5ms on/off
	Horizontal Viewing Angle (typical CR>10)	170°
	Vertical Viewing Angle (typical CR>10)	160°
	Panel Active Area (w x h)	476.64mm x 268.11mm

NOTE: Performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary either higher or lower.

Color Gamut Coverage	NTSC	72%
Color Management	Calibrated Color Presets	Native
	Color Space / Subsampling Support	No
	RGB Channel Adjust	Yes, Gain
	Integrated Calibration Instrument	No
	Standalone / Schedule Calibration	No
	Scriptable Calibration	No
	Default Color Temperature	Neutral (6500K)
Monitor Specifications	Bezel	Standard
	Color	Black Head
	Tilt	-5 to +20°
	Swivel	No Swivel
	Pivot	No Pivot
	Height Adjustment Range	No height adjust
	VESA Mounting	100mm x 100mm
	Integrated Privacy Filter	No



Technical Specifications

	10/15	
	Security Lock Ready	Standard Security Lock Slot
	Detachable Stand	Yes
	Warranty (number of years)	V22 (1/0/0 for AMS ,1/1/0APJ ,3/3/3 for EMEA)
		P22v G4(3/3/0 or 3/3/3)
	Low Blue Light Mode	Yes (TÜV certified)
	Zero Bright Dot Warranty	No
	Touch-Enabled	Not touch-enabled
	rouch-Endoted	
Multimedia	Webcam	No integrated webcam
	Windows Hello Compatible	No
	Microphone	No Microphone
On Screen Display (OSD)	Native Resolution	Full HD (1920 x 1080)*
(*Apply to high resolution and/or high frame rate displays only. CONFIRM WITH EPM whether disclaimer applies.
	Maximum Resolution	1920 x1080 @ 60Hz
	Preset Graphic Modes/Supported	11
	Resolutions	11
	Minimum Vertical Scan Rate	50 Hz
	Maximum Vertical Scan Rate	60 Hz
	Minimum Horizontal Scan Rate	30.0 kHz
	Maximum Horizontal Scan Rate	80.0 kHz
	Maximum pixel clock	170 MHz
	User Programmable Modes	10
	User-Assignable Function Buttons	Yes, 3 buttons
	Audio	No
	Languages	10 (English, Spanish, German, French, Italian, Netherlands,
		Portuguese, Japanese, T-Chinese and S-Chinese)
Connector Types	HDMI	1 HDMI 1.4
	VGA	1 VGA
Device 0. Operating	Damas Guarda	
Power & Operating Specs	Power Supply	Internal
Shere	Power Source	100 – 240 VAC 50/60 Hz
	Power Consumption - Maximum Energy Saving/Standby Mode	19 W
	Power Consumption - Typical	0.5 W
	Power cable lenght	18.5 W
	Power cable tengin	1.9m
Energy Star Data	Operational Mode at 100 VAC	12.3 W
	Operational Mode at 115 VAC	12.34 W
	Operational Mode at 230 VAC	12.56 W
EU Energy Efficiency Class (ERP Lot5)	On-mode Power Consumption	13 W
	Annual Power Consumption	19 kWh
	Energy Efficiency Class	D
Operating Conditions	Operating Temperature - Celsius	5o – 35oC



Technical Specificat	tions		
	Operating Temperature - Fahrenheit Non-operating Temperature - Celsius Non-operating Temperature - Fahrenheit Operating Humidity Non-operating Humidity Operating Altitude Non-operating Altitude	410 – 950F –40° – 65°C -40° – 149°F 20 – 80% Relative Humidity 5 – 95% 0 – 5,000 m (16,400 ft.) 0 – 12,192 m (40,000 ft.)	y (non-condensing)
Environmental Features and Certifications	Mercury-free LED display backlighting Arsenic-Free Display Glass	Yes, Mercury-free LED back Yes	lights
	Agency Approvals and Certifications	Star/ISC/VCCI/FCC/BSMI/Vie	E/TUV-S/ISO 9241-307/ CEL/CECP/SEPA/TCO/Energy etnam MEPS/Australian-New h Africa/ Ukraine / BIS / GS / Low
	Microsoft WHQL Certification ENERGY STAR® Certified	Win 10, Win 8, Win 7 Yes	
	EPEAT® Registered	Yes Based on US EPEAT® registrati	ion according to IEEE 1680.1-2018 try. Visit www.epeat.net for more
	China Energy Label	CEL Grade 1	
	TCO Certified	Yes	
	SmartWay Transport Partnership -NA only	Yes (NA sku)	
Recycled Plastics	Contains Recycled Plastics	35% recycled ABS	
•	Recyclable Packaging (Box, packing materials)	69.6% Circular packing material	
		<u>Metric</u>	<u>Imperial</u>
Unit Product/Package Specifications	Product Dimensions (Unpacked with stand) (W x D x H)	505×188.95×381.26 mm	 19.88×7.44×15.01 in
	Product Dimensions (Packed) (W x D x H)	567×120×387mm	19.88×1.65×12.21 in
	Display Head Dimensions (Unpacked without stand) (W x D x H)	505×42×310.26 mm	22.32×4.72×15.24 in
	Base Area Footprint (w × d mm)	188.95 x 181 mm	7.44 x 7.13 in
	Bezel Measurements	top15.97 mm side 24.19 mm bottom 13.17 mm	top 0.63 in side 0.95 in bottom 0.52 in
	Product Weight (Unpacked with stand)	2.85 kg	6.28 lb
	Product Weight (Packed)	3.79 kg	8.36 lb
	Product Weight (Head Only)	2.48 kg	5.47 lb



Technical Specifications

Pallet Information	Pallet Dimensions (L × W × H)	Slip Sheet: L: 1150 x W: 970 x H: 1948 mm (40' ft)	Slip Sheet: L45.28 x W38.19 x 76.69 inch (40' ft)
		Pallet: L: 1150 x W: 970 x H: 2067 mm (40' ft)	Pallet: L45.28 x W38.19 x 81.38 inch (40' ft)
	Pallet Total Weight	Slip Sheet: 307KG (40' ft) Pallet: 323KG (40' ft)	Slip Sheet: 676.82 lb (40' ft) Pallet: 712.09 lb (40' ft)
	Pallet Layers	5 layers per palle (40' ft)	
	Pallet Product per Layer	16 per layer (slip sheet & pallet)	
	Total Products per Pallet	80sets per pallet (slip sheet & pallet)	
	Container Load, 20-Foot	960 sets (slip sheet and pallet)	
	Container Load, 40-Foot	1920 sets (slip sheet and pallet)	
	Container Load, 40-Foot HighQ	2304 sets (slip sheet & pallet)	
What's in the box?	VGA cable (1.5m) (Production before Dec'2 HDMI cable (1.8m) (Production from Dec'20 DOC Kit (includes Product Notice, warranty Power cord (1.9m)), Inbound PN -A07)	
	Note: China continue ship with VGA cable, r	no HDMI cable.	
User Guide and Warranty Languages	User Guide Languages		nan, Greek, Hungarian, Italian, Norwegian, Polish, Brazilian
	Warranty Languages		nan, Greek, Hungarian, Italian, Norwegian, Polish, Brazilian

Copyright © 2021 HP Development Company, L.P.

The information contained herein is subject to change without notice. The only warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. ENERGY STAR is a registered trademark owned by the U.S. Environmental Protection Agency.



Summary

Change Log			
February 23, 2021	V1 to V2	Update	What's in the box? Section
March 10, 2021	V2 to V3	Update	EU Energy Efficiency Class
April 13, 2021	V3 to V4	Update	VESA Mounting Specs
	V4 to v5		

